

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : H01Q 1/24, H04B 1/38, H01Q 17/00		A2	(11) International Publication Number: WO 98/20577
			(43) International Publication Date: 14 May 1998 (14.05.98)
(21) International Application Number: PCT/SE97/01790			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 28 October 1997 (28.10.97)			
(30) Priority Data: 9604016-7 4 November 1996 (04.11.96) SE			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors: MÅRTENSSON, Dag, Johan, Fredrik; Backagården, Holmby 16:4, S-240 32 Flyinge (SE). HÅKANSSON, Hans, Kenneth; Börringegatan 1B, S-217 72 Malmö (SE). YING, Zhinong; S:t Hans Gränd 24 B, S-226 42 Lund (SE).			
(74) Agents: STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).			

Published*Without international search report and to be republished upon receipt of that report.*

(54) Title: A RADIO TELEPHONE WITH HIGH ANTENNA EFFICIENCY

(57) Abstract

A radio telephone, preferably intended for cellular telecommunication, has an apparatus housing (20) and at least one antenna (21), which is mounted to or in connection with the apparatus housing for performing the wireless communication of the radio telephone by transmitting and receiving radiofrequency electromagnetic waves in a given wavelength range. A current-reducing means (30, 31) is mounted to the apparatus housing (20) between the antenna (21) and a side (23) of the radio telephone, which during normal use faces a human user (1). The means has conductive as well as dielectric properties and is arranged to reduce or eliminate electric currents present in and/or on the apparatus housing (20) between the antenna (21) and said side (23) of the radio telephone.

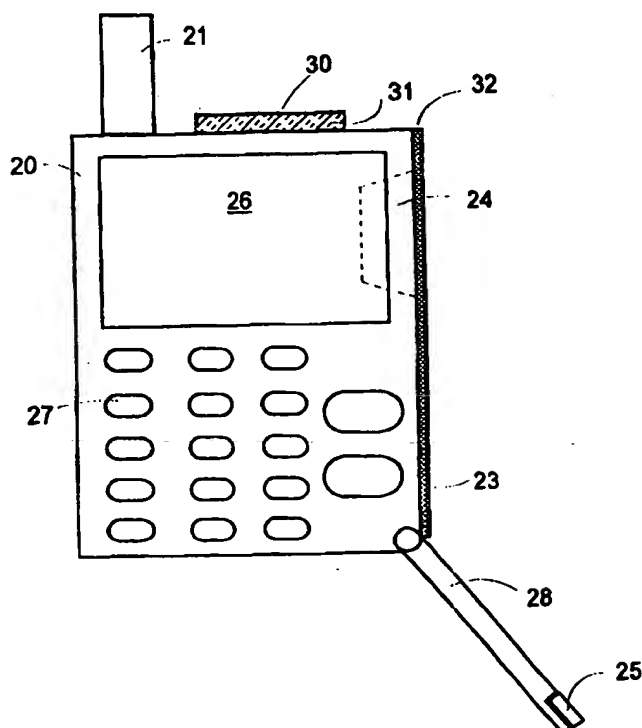

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A RADIO TELEPHONE WITH HIGH ANTENNA EFFICIENCY

Technical Field

The present invention relates to a radio telephone,
5 preferably for use in cellular telecommunications,
comprising an apparatus housing and at least one antenna,
which is mounted on or in connection with the apparatus
housing for performing the wireless communication of the
radio telephone by transmitting and receiving radiofrequent
10 electromagnetic waves within a certain wavelength range.

Description of the Prior Art

During the last decade the above-mentioned technical
field has been the subject of a very rapid growth. As
15 portable mobile telephones have become more compact and
useful, they have gained popularity, and today mobile
telephones are used by a major portion of the population in
many countries.

A problem with the compact and low-weight mobile
20 telephones of today is the signal degradation, which occurs
during calls due to the mobile telephone antenna being
located proximate to the user's body, the hand and the head
in particular. This interaction between the body and the
near field of the antenna will normally cause deteriorated
25 antenna properties, mainly because of reflections and
absorption losses. The shorter the distance is between the
antenna and the user, the larger becomes the signal degra-
dation. This means that requirements for satisfactory
antenna efficiency are difficult to fulfil together with
30 requirements for physical compactness and robustness.

Modern mobile telephones often use quarterwave type
antennas in addition to, or as replacement for, longer
halfwave type antennas. Quarterwave antennas have the
advantage of a compact and robust size, particularly if the
35 antenna is realized as a helix antenna. A feature of
quarterwave antennas is that they generate electric

currents in and/or on the mobile telephone chassis. Since the chassis has conductive properties - for practical reasons the chassis is produced from metal or metallized plastics - such chassis currents themselves generate
5 electromagnetic fields, wherein the antenna efficiency is reduced because of the interaction with the user, as described above.

A high antenna efficiency is desired not only because the communication quality is improved, for instance as an
10 increased signal-to-noise ratio, but also because this provides for a lower power consumption and consequently prolonged usage time as well as reduced heat generation. In order to improve the antenna efficiency it is previously known to maximize the distance between the antenna and the
15 user's head. One example is given in JP-A-7212822 and in EP-A-0 689 297, in which an antenna is arranged on top of a longside of the mobile telephone, while a speaker and a microphone are arranged at an opposite longside. Thus, the telephone is intended to be held in such a way, that the
20 longside with the speaker and the microphone is in contact with the user's head, while the opposite longside with the antenna will be relatively far from the user.

DE-A-43 00 705 discloses a portable telephone, wherein a conductive plate is arranged to act as a virtual
25 ground plane for preventing high-frequency currents from being generated in the telephone body.

Furthermore, it is known to provide the mobile telephone with means for screening, absorbing or reflecting electromagnetic radiation. Such means may be arranged along
30 the side of the antenna facing the user, and also on or inside the telephone chassis. Examples of previously known radio telephones of this kind are disclosed in US-A-5 493 704, US-A-5 335 366, WO95/31048 and JP-A-7123463.

Summary of the Invention

A main object of the present invention is to provide a radio telephone with high antenna efficiency by reducing the electrical energy losses and minimizing the interaction
5 between antenna and user, without limiting the opportunities to realize the radio telephone in a compact size and with an antenna well suited for communication.

A further object of certain embodiments of the invention is to provide a compact radio telephone with a large
10 space for display and keypad.

The above-mentioned main object is achieved by a radio telephone, preferably for cellular telecommunication, comprising an apparatus housing and at least one antenna, which is mounted on or in connection with the apparatus
15 housing for performing the wireless communication of the radio telephone by transmitting and receiving radio frequent electromagnetic waves in a certain wavelength range, wherein a current-reducing means is mounted to the apparatus housing between the antenna and the side of the
20 radio telephone, which normally is in contact with a human user, the current-reducing means having conductive as well as dielectric properties and being arranged to reduce or eliminate electric currents present in and/or on the apparatus housing between the antenna and said side of the
25 radio telephone.

Preferred embodiments of the invention are defined by the subsequent dependent claims.

Brief Description of the Drawings

30 The invention will be described in more detail in the following, reference being made to the accompanying drawings, in which

FIG 1 is a schematic front view of a portable radio telephone according to the prior art,

FIG 2 is a side view of the prior art radio telephone according to FIG 1,

FIG 3 schematically illustrates the use of the radio telephone according to FIGs 1 and 2,

5 FIG 4 is a schematic front view of a portable radio telephone according to a preferred embodiment of the invention,

FIG 5 is a side view of the radio telephone according to FIG 4,

10 FIG 6 is a perspective view of an upper portion of the radio telephone according to FIGs 4 and 5,

FIG 7 schematically illustrates a current-reducing means, which is arranged in the radio telephone according to the invention, and

15 FIG 8 schematically illustrates the use of the radio telephone according to the invention.

Detailed Disclosure of the Invention

As an introduction the problems and drawbacks described above when using a typical radio telephone of
20 conventional design will be discussed with reference to FIGs 1-3. The known radio telephone comprises an apparatus housing 10, an antenna 11, a battery 12, a loudspeaker 14, a microphone 15, a display 16, and a keypad 17. The antenna
25 11 is mounted on top of the radio telephone and may be a quarterwave antenna, thus offering the advantage of a compact size. The loudspeaker 14 as well as the microphone 15 are arranged on the front side 13 of the radio telephone, thereby limiting the available space for the keypad
30 17 and - in particular - the display 16.

According to FIG 3 the radio telephone is intended to be used by a user 1 for wireless communication with the rest of the world. During ongoing calls the front side 13 of the radio telephone is in contact with the head of the
35 user. Thus, due to the design described above the distance

d between the antenna 11 and the head 1 is quite short, thereby causing a signal degradation, which is not negligible but which on the contrary is considerable. In reality the distance d may be as short as about 10 mm. In situations where the antenna 11 is a quarterwave type antenna, the problem is emphasized due to the electric currents generated in the chassis, as described above.

In FIG 4 a front view of a radio telephone according to a preferred embodiment of the invention is shown. FIG 5 illustrates a side view of the radio telephone, and FIG 6 is a perspective view of an upper portion of the radio telephone. The radio telephone comprises an apparatus housing 20, on top of which an antenna 21 is arranged. The antenna 21 has a design known per se, preferably a quarter-wave type design, and is located proximate to a first longside of the apparatus housing 20. The apparatus housing consists of an appropriate material, such as metal or metallized plastics, the purpose of which, among other things, is to protect the internal components of the radio telephone against external influence, to provide a convenient "handle" for the user and to act as a chassis for other components. Furthermore, the radio telephone comprises a display 26 and a keypad 27, which are known per se and which are arranged on the front side of the radio telephone. A battery 22 is arranged in the rear portion of the radio telephone, as schematically indicated by dashed lines in FIG 5.

Unlike the conventional design described above the loudspeaker 24 as well as the microphone 25 are according to the preferred embodiment arranged at a second longside 23 of the radio telephone. This second longside 23 is located opposite to the first longside, at which the antenna 21 is arranged. The microphone 25 is mounted at the end of a whip element 28, which may be extended from the radio telephone. According to FIG 8 this arrangement

provides a considerably longer distance d between the antenna 21 and the user 1, when the user holds the radio telephone against his head during calls. The arrangement has the further advantage of allowing a larger area for the display 26 in particular. The display 26 may be made at least twice as big as the display 16 in the conventional telephone according to FIGs 1-3, thereby providing important advantages as regards user-friendliness. Besides the opportunity of having more and/or longer lines of text - or a larger character size - the display may be of a graphic kind rather than solely character-based.

The most important feature of the present invention is that a current-reducing means has been arranged at the apparatus housing 20 between the antenna 21 and said second side 23 of the radio telephone. The purpose of this means is to reduce or eliminate chassis currents present in the apparatus housing so as to minimize the electrical energy losses. Such chassis currents are otherwise frequently occurring, particularly if the antenna is of quarterwave length. According to the preferred embodiment of the invention the current-reducing means is constituted by a quarter-wave plate, comprising an element 30 of metal or other electrically conductive material with an approximatively L-shaped cross section (cf. FIGs 4 and 7). A slot is formed between the upper portion of the element 30 and underlying parts of the apparatus housing 20.

The quarterwave plate is schematically illustrated in FIG 7. The plate has the characterizing feature of acting as a band-stop filter for an electric current i in a certain frequency range. If the length ℓ corresponds to one quarter of the wavelength at the carrier frequency of the signal transmitted by the antenna, a standing-wave phenomenon occurs in the quarterwave plate, when an electric current originating from the quarterwave antenna flows through the plate. Thanks to the standing-wave the impe-

dance becomes almost infinitely large, thereby more or less completely cutting off the current. This is schematically illustrated in a current profile diagram in the upper part of FIG 7, from which it appears that the current magnitude
5 i becomes weaker and weaker along the longitudinal extension of the quarterwave plate and almost completely disappears at the far end (the rightmost end in the drawing) of the quarterwave plate.

In a mobile telecommunications system such as GSM
10 carrier frequencies of around 900 MHz are used, which correspond to a quarterwave length of slightly more than 8 cm. However, to have a 8 cm long quarterwave plate arranged on or in the apparatus housing of a modern radio telephone would be clearly inappropriate, since this would severely
15 restrict the opportunities of a compact apparatus design. According to the preferred embodiment of the invention a dielectric element 31 is therefore arranged in the slot, which is formed between the upper portion of the metal element 30 and underlying parts of the apparatus housing.
20 The dielectric element 31 has a relative dielectric constant ϵ_r , which is greater than 1, and hence the length ℓ of the metal element 30 may be drastically reduced with preserved current-reducing effect in the wavelength range in question. More specifically, the necessary length ℓ
25 decreases a factor $(1/\sqrt{\epsilon_r})$ according to the formula

$$\ell = \frac{\lambda/4}{\sqrt{\epsilon_r}}, \text{ where } \lambda \text{ represents the wavelength at a given}$$

carrier frequency.

According to the preferred embodiment the dielectric
30 element 31 has a relative dielectric constant $\epsilon_r \approx 10$, yielding $\ell \approx 2.6$ cm.

The current-reducing means 30, 31 may be arranged on top of the apparatus housing 20, as is indicated in the drawings, or be molded into it.

Further measures have been taken according to the preferred embodiment so as to reduce unnecessary electric chassis currents. Hence, the longside 23 of the radio telephone (the side which during normal use of the radio telephone faces or contacts the cheek of the user 1) is covered with a layer 32 of a material, which is capable of reducing such chassis currents. Preferably a composite material like ECCOSORB[®] is used, which is commercially available from Grace Electronic Materials (Grace N.V.), Nijverheidsstraat 7, 2260 Westerlo, Belgium. The properties of this material family are known per se in various microwave applications, and consequently they are not described in more detail herein. As an alternative to an outer layer 32 the current-reducing material may be integrated with the chassis plastic material.

In summary, according to the preferred embodiment described above, which comprises a) means 30, 31 for reducing chassis currents, b) the arrangement of the loudspeaker 24 and the microphone 25 at a longside 23 of the radio telephone and c) a layer 32 of current-reducing material at said longside, a radio telephone is obtained, where the distance d between the antenna 21 and the user 1 is maximized and where the electrical energy losses are minimal. This provides advantages such as improved antenna efficiency, higher signal-to-noise ratio and reduced battery consumption. The arrangement has the further advantages of improved communication properties (minimized interaction between the antenna and the user) as well as improved user-friendliness (a large and informative display).

The invention has been described above by way of a preferred embodiment. This disclosure has illustrating but

not limiting purposes. On the contrary, the invention may be realized in several ways within the protectional scope of the invention, as defined by the appended independent patent claims.

CLAIMS

1. A radio telephone, preferably for cellular telecommunications, comprising an apparatus housing (20) and at least one antenna (21), which is mounted to or in connection with the apparatus housing for performing the wireless communication of the radio telephone by transmitting and receiving radiofrequent electromagnetic waves in a given wavelength range, characterized by
- 5 a current-reducing means (30, 31) arranged at the apparatus housing (20) between the antenna (21) and a side (23) of the radiotelephone, which during normal use faces a human user (1), said current-reducing means having
- 10 conductive as well as dielectric properties and being arranged to reduce or eliminate electric currents present in and/or on the apparatus housing (20) between the antenna (21) and said side (23) of the radio telephone.
- 15
2. A radio telephone according to claim 1, characterized in that the current-reducing means is a quarterwave plate (30, 31).
- 20
3. A radio telephone according to claim 2, characterized in that the quarterwave plate comprises a metal element (30) with essentially L-shaped cross-section, a slot being formed between an upper
- 25 portion of the metal element (30) and underlying parts of the apparatus housing (20).
4. A radio telephone according to claim 3, characterized by a dielectric element (31) arranged in said slot.
- 30
5. A radio telephone according to claim 4, characterized in that the length l of the metal element (30) and the value of the relative
- 35

dielectric constant ϵ_r of the dielectric element (31) are selected to fulfil

$$\ell \cong \frac{\lambda}{4\sqrt{\epsilon_r}}, \text{ where } \lambda \text{ represents a wavelength in said}$$

wavelength range.

5

6. A radio telephone according to any preceding claim, characterized in that the side (23) facing the user (1) is covered with a layer (32) of a material, which is capable of reducing electric currents present in and/or on the apparatus housing.

10

7. A radio telephone according to any preceding claim, characterized by: a loudspeaker (24) and a microphone (25), which are arranged at a first longside (23) of the radio telephone; an antenna (21), which is arranged at an opposite second longside, at an upper side or at a lower side of the radio telephone; and a display (26) and a keypad (27), which are arranged at another side - preferably a front side - different from said sides of the radio telephone.

15

20

25

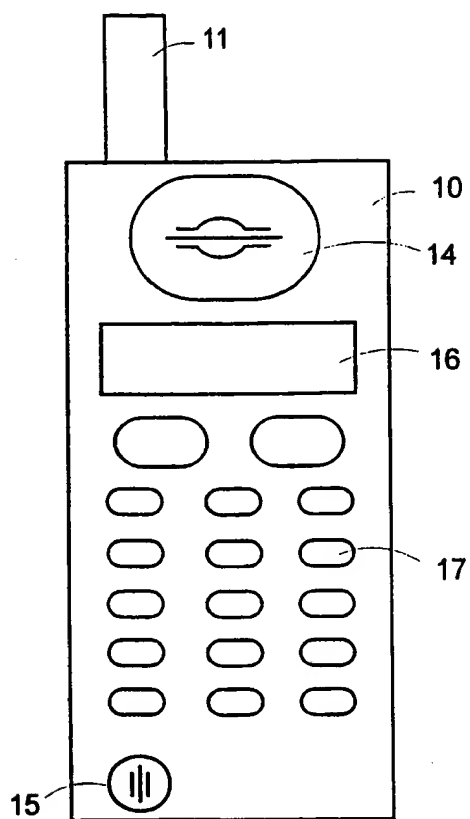


FIG 1

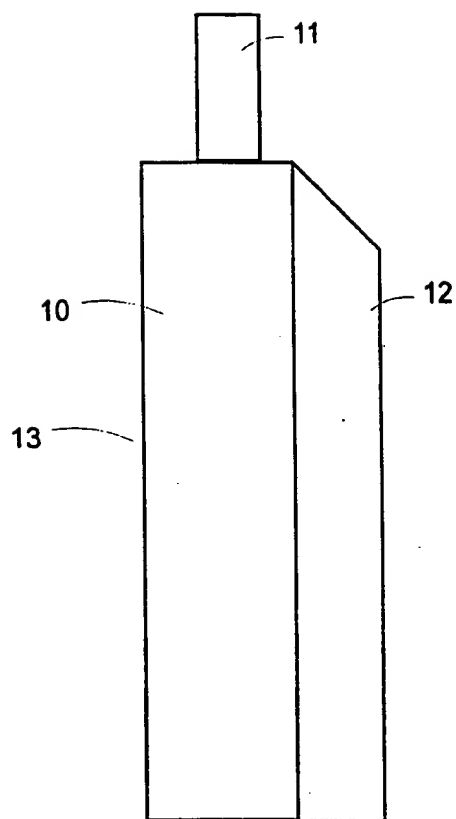


FIG 2

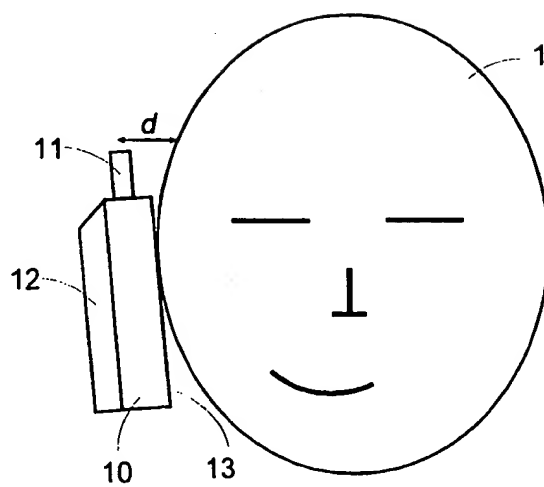


FIG 3

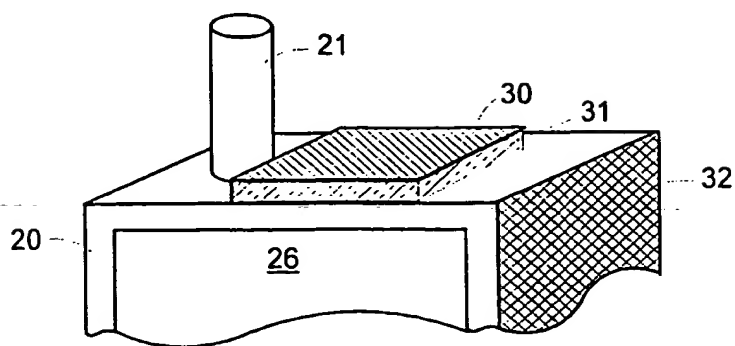
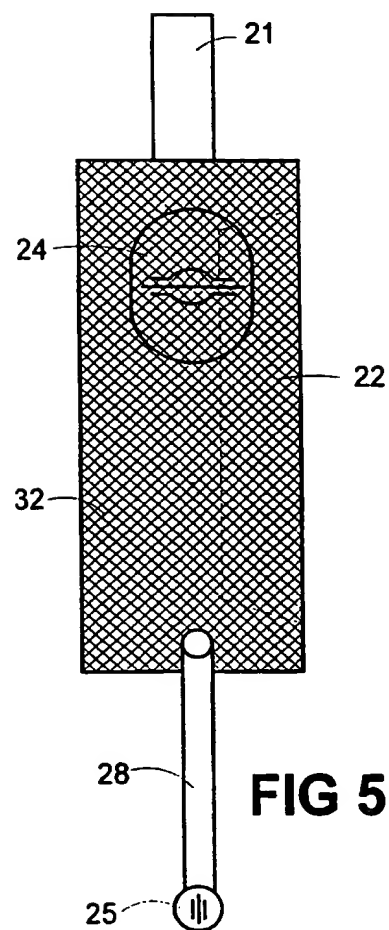
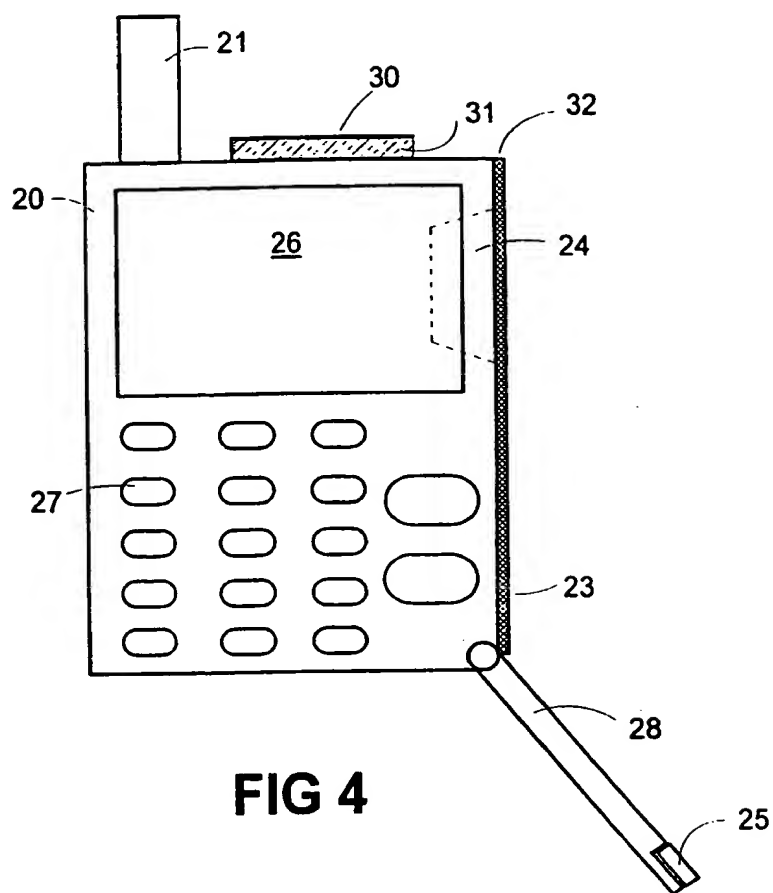


FIG 6

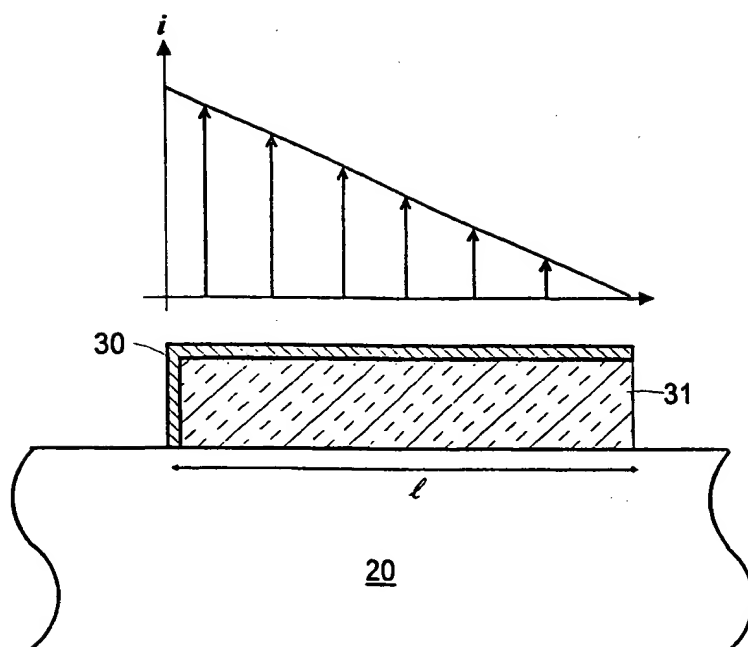


FIG 7

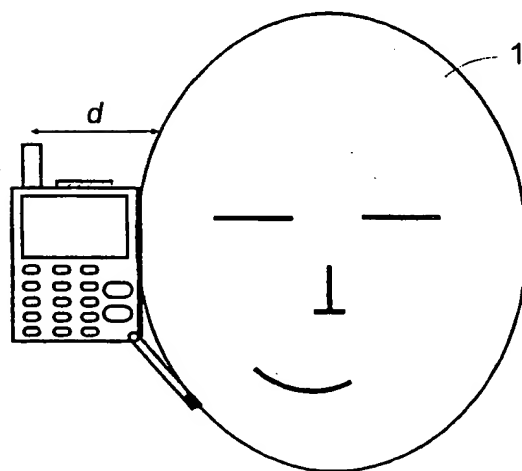


FIG 8

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01Q 1/24, H04B 1/38, H01Q 17/00		A3	(11) International Publication Number: WO 98/20577
			(43) International Publication Date: 14 May 1998 (14.05.98)
(21) International Application Number: PCT/SE97/01790			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 28 October 1997 (28.10.97)			
(30) Priority Data: 9604016-7 4 November 1996 (04.11.96) SE			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors: MÅRTENSSON, Dag, Johan, Fredrik; Backagården, Holmby 16:4, S-240 32 Flyinge (SE). HÅKANSSON, Hans, Kenneth; Börtingegatan 1B, S-217 72 Malmö (SE). YING, Zhinong; S:t Hans Gränd 24 B, S-226 42 Lund (SE).			
(74) Agents: STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).			

Published


With international search report.

(88) Date of publication of the international search report:
2 July 1998 (02.07.98)

(54) Title: A RADIO TELEPHONE WITH HIGH ANTENNA EFFICIENCY

(57) Abstract

A radio telephone, preferably intended for cellular telecommunication, has an apparatus housing (20) and at least one antenna (21), which is mounted to or in connection with the apparatus housing for performing the wireless communication of the radio telephone by transmitting and receiving radiofrequency electromagnetic waves in a given wavelength range. A current-reducing means (30, 31) is mounted to the apparatus housing (20) between the antenna (21) and a side (23) of the radio telephone, which during normal use faces a human user (1). The means has conductive as well as dielectric properties and is arranged to reduce or eliminate electric currents present in and/or on the apparatus housing (20) between the antenna (21) and said side (23) of the radio telephone.

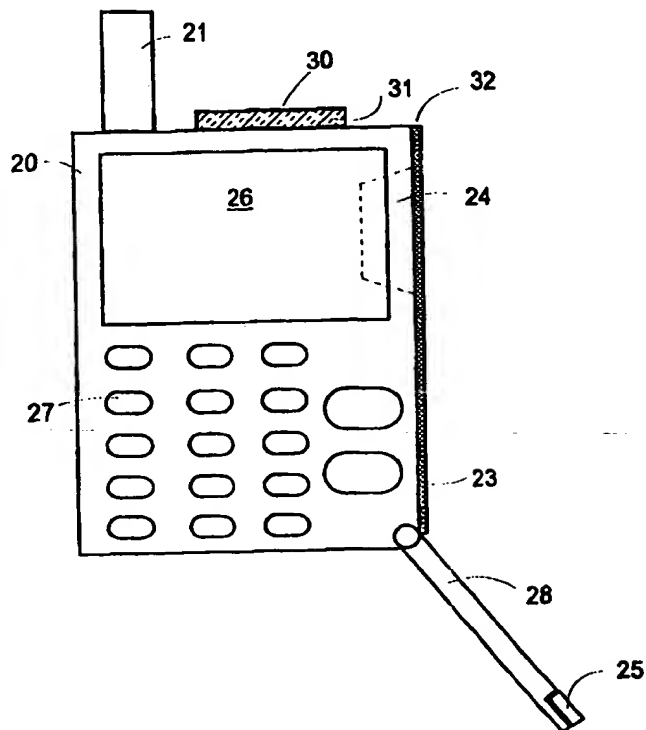

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/SE 97/01790

A. CLASSIFICATION OF SUBJECT MATTER

 IPC6: H01Q 1/24, H04B 1/38, H01Q 17/00
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01Q, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4300705 A1 (MURATA KIKAI K.K.), 29 July 1993 (29.07.93), column 2, line 41 - line 63, figures 1, 2 --	1-6
A	EP 0638955 A1 (PHILIPS PATENTVERWALTUNG GMBH), 15 February 1995 (15.02.95), claims 1-3, abstract --	1-6
A	JP 7212822 A (SONY CORP), 11 August 1995 (11.08.95), abstract -- -----	7

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

• Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 April 1998

Date of mailing of the international search report

30 -04- 1998

 Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

 Göran Magnusson
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/04/98

International application No.

PCT/SE 97/01790

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
DE	4300705	A1	29/07/93	FR	2686752	A,B	30/07/93
				JP	2531394	B	04/09/96
				JP	6291711	A	18/10/94

EP	0638955	A1	15/02/95	DE	4326117	A	09/02/95
				JP	7094927	A	07/04/95

JP	7212822	A	11/08/95	NONE			
